
# UTV SC70S

## SERIES PRODUCT SPECIFICATION




### Product Features


- All-in-One Kit – Ready for retail and events, plug-n-play.
- Advanced COB Tech – High contrast, anti-glare, low blue light.
- Energy-Saving Design – 25% less power than common anode LEDs.
- Multi-Screen Cascading – Expand seamlessly for larger displays.
- Cloud Management – Remote control for screens and content.







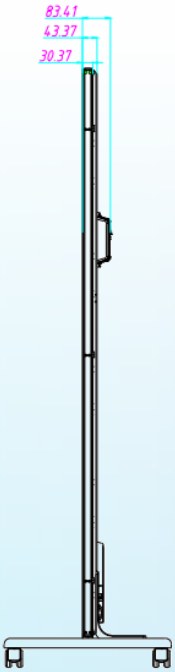
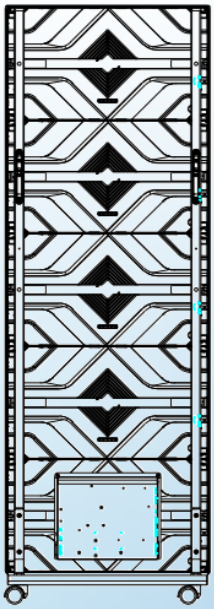
# SPECIFICATION PARAMETERS

| Parameter | | UTV SC70S | | |
|---|---|---|---|---|
| Basic Parameters | Size（inch） | 70 | | |
| | Resolution（W*H） | 480x1350 | 384x1080 | 320x900 |
| | Pixel Pitch（mm） | 1.2 | 1.5 | 1.8 |
| | Visible Area（㎡） | 1.0125 | | |
| | Dimensions（mm） | 611*1790 | | |
| | Thickness（mm） | 30 (excluding back beam)/42 (including back beam) | | |
| | Planeness（mm） | ≤0.1 | | |
| | Weight（kg） | 26.1 (excluding base)/33 (including base) | | |
| | Material | Die-Cast Aluminum | | |
| | Border Material/Colour | Aluminum Profile/ Black | | |
| | Maintenance | Front and Rear | | |
| | Installation Method(Standard) | Stand-mounted | | |
| | Installation Method(Optional) | Hanging/Slant Support | | |
| Display Parameters | LED Type | COB | | |
| | LED Life Time (Hrs) | ≥100000 | | |
| | Horizontal/Vertical Viewing Angle (degree) | H:170°/V:160° | | |
| | Brightness (cd/m²) | 600/800 (adjustable) | | |
| | Refresh Rate（Hz） | 3840 | | |
| | Video Frame Rate (Hz) | 50/60 | | |
| | Processing Depth（bit） | 19 | | |
| | Contrast Ratio | 10000:1/12000:1 | | |
| | Color Temperature (K) | 2000K~9500K | | |
| | Pixel Level Brightness Calibration | Support | | |
| | Pixel Level Color Calibration | Support | | |
| | Brightness Uniformity | ≥98% | | |
| | Color uniformity | ±0.003Cx,Cy or less | | |
| | Interface | HDMI in*1,HDMI out*1,LAN*1,USB3.0*1, AUDIO out*1,POWER in*1，POWER out*1 | | |
| | WiFi | 2.4G | | |
| Operation Parameters | Input Voltage | AC 100 V ~ 240 V, 50-60Hz | | |
| | Average Power Consumption (W) | 155/175 | 135/160 | 145/165 |
| | Peak Power Consumption (W) | 270/330 | 250/320 | 250/315 |

# SPECIFICATION PARAMETERS

| | | |
|---|---|---|
| | Operating Temperature/Humidity | -10℃~+45℃/10~80% RH |
| | Storage Temperature/Humidity | -20℃~+50℃/10~70% RH |

**Note:**

1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product,
2. The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. in actual use, it may be slightly different due to product batch diferences, configuration differences, software versions, use, conditions and environmental factors. Actual usage shall prevail.