
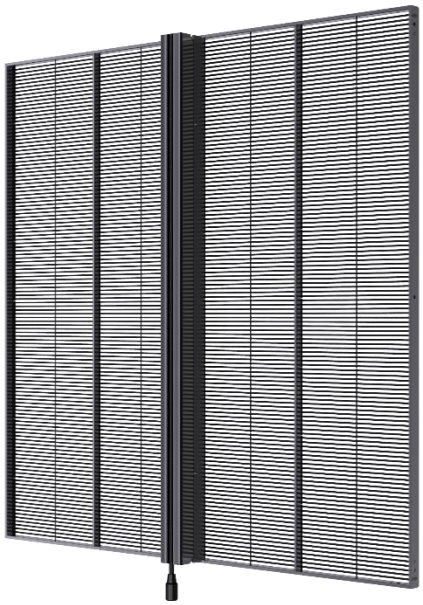


Umake Series UVF

UVF2.6 Front Luminous Vanish Screen

Product Features:

- 51% High Transparency
- 8 kg/m² Lightweight Design
- Concise Structure, Efficient Installation
- Front/Rear Maintenance, Quick and Easy

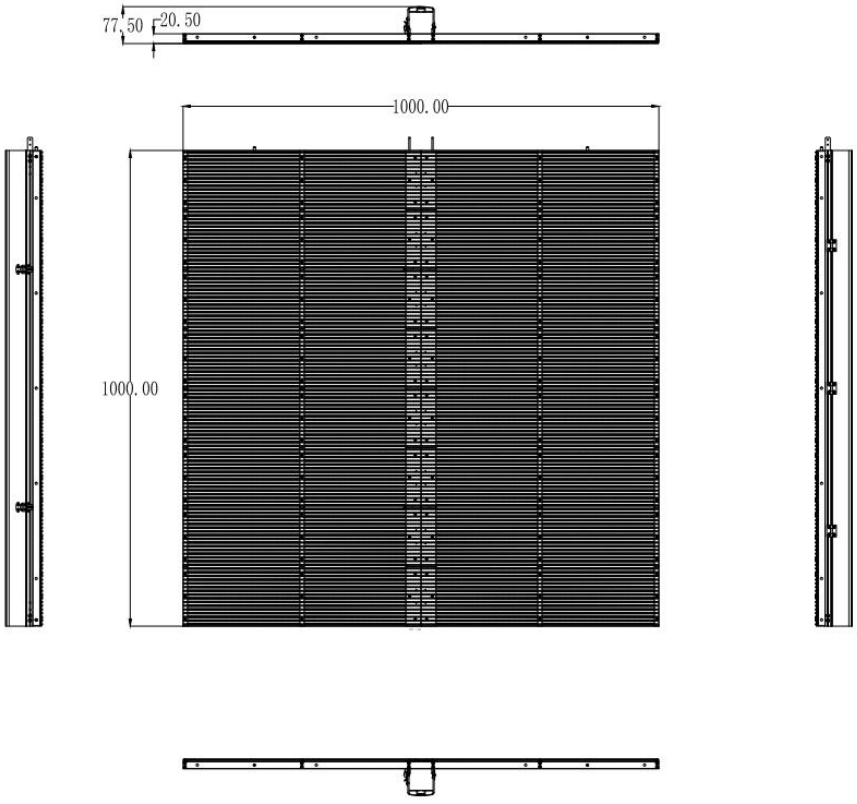

Address: Unilumin, 18 Haoye Road, Fuhai Street, Baoan District, Shenzhen
Contact number: 400-677-3888 Post Code: 518103
Website: http://www.unilumin.com
Update time: V1.5 2024.06.26

SPECIFICATION PARAMETERS:

Specification	UVF2.6
Pixel Pitch	2.6-6.9 mm
Material	Profile Aluminium
Transparency	51%
LED Type	1R1G1B
Pixel Density	55296 dot/m^2
Panel Direction	Horizontal
Panel Size	1000 x 1000 mm
Pixel Per Panel	55296 dots
Brightness	4500 nits
Color Temperature	3200 - 9300 K (Adjustable)
Gray Scale	14 bit
Refresh Rate	≥ 3840Hz
Weight	8 kg/m^2
Peak Power Consumption	680 W/m^2
Typical Power Consumption	277 W/m^2
Viewing Angle	120°
Installation Method	Lifting/Fixing
Maintenance Method	Front/Rear
Ingress Protection	IP30
Operating Temperature/Humidity	-10℃~+45℃/10~80%RH (No Freeze)
Storage Temperature/Humidity	-20℃~+55℃/10~85%RH (No Freeze)

Note:

1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product;

2. The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.