
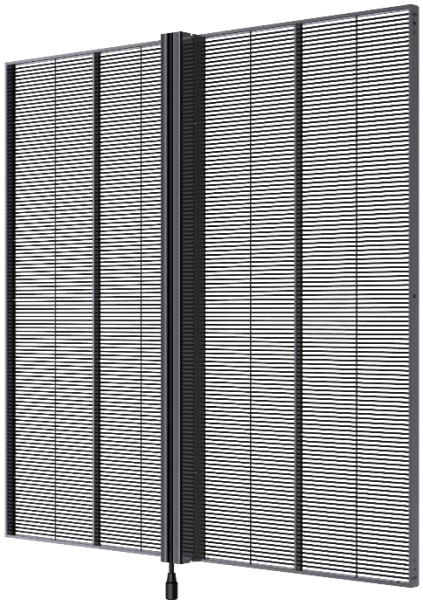


Umake Series UVF

UVF3.9 Front Luminous Vanish Screen

Product Features:

- 56% High Transparency
- 8 kg/m^2 Lightweight Design
- Concise Structure, Efficient Installation
- Module Front Maintenance, Quick and Easy

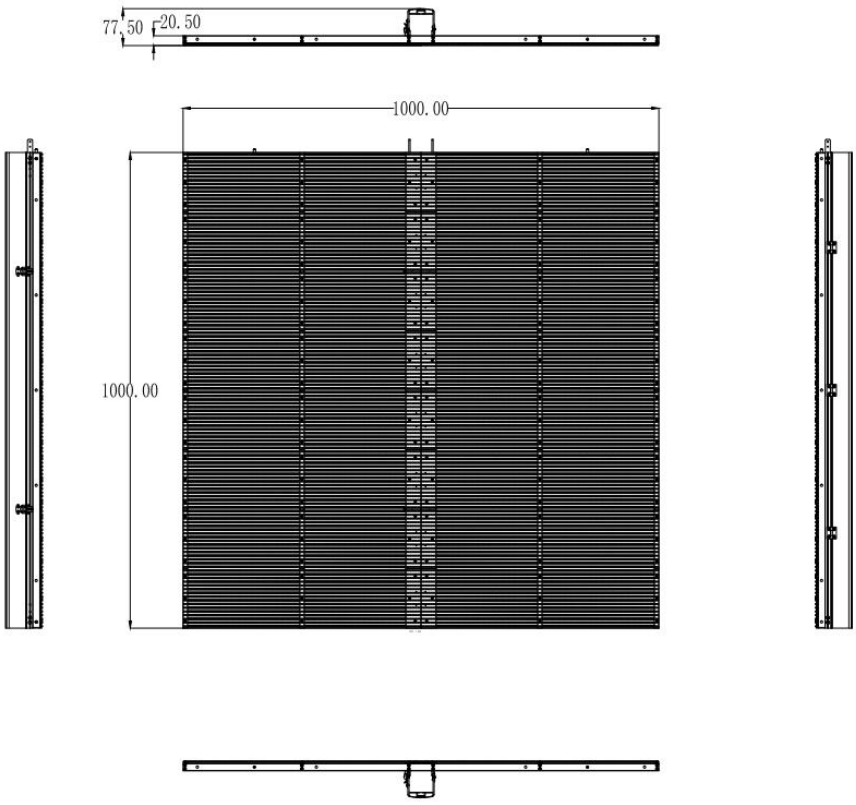

Address: Unilumin, 18 Haoye Road, Fuhai Street, Baoan District, Shenzhen
Contact number: 400-677-3888 Post Code: 518103
Website: http://www.unilumin.com
Update time: V1.7 2025.04.07

SPECIFICATION PARAMETERS:

Specification	UVF3.9
Pixel Pitch	3.9-7.8 mm
Material	Profile Aluminium
Transparency	56%
LED Type	1R1G1B
Pixel Density	32,768 dot/m^2
Panel Direction	Horizontal
Panel Size	1000 x 1000 mm
Pixel Per Panel	256 x 128 dots
Brightness	4500 nits
Gray Scale	14 bit
Refresh Rate	≥ 3840Hz
Weight	8 kg/m^2
Peak Power Consumption	680 W/m^2
Typical Power Consumption	227 W/m^2
Viewing Angle	120°
Installation Method	Lifting/Fixing
Maintenance Method	Front
Ingress Protection	IP30
Operating Temperature/Humidity	-10℃~+45℃/10~85%RH (No Freeze)
Storage Temperature/Humidity	-20℃~+55℃/10~80%RH (No Freeze)

Note:

1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product;

2. The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.