
Uluxe Series




Ultra-thin Front Maintenance 16:9 LED Display Uluxe 2.5 Pro

Product features:

- Thickness of 45mm, ultra-thin and ultra-light design.
- Front and rear installation ,full front maintenance.
- XYZ six-way adjustment.
- 800nits High Brightness
- 7680Hz High Refresh

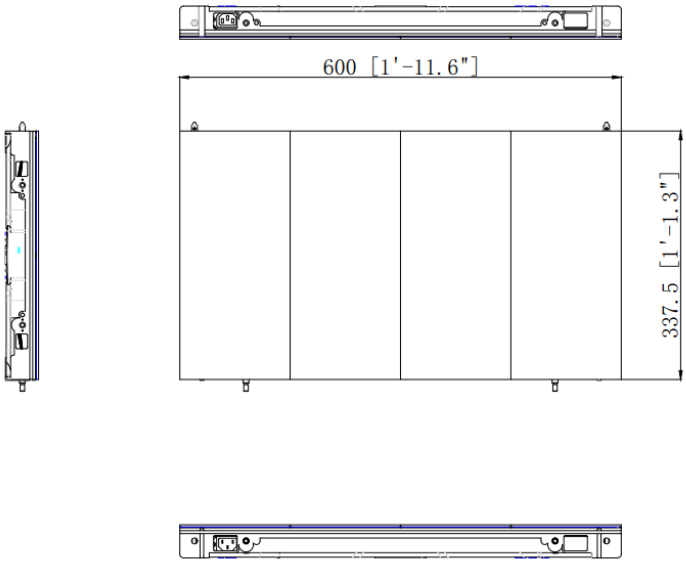

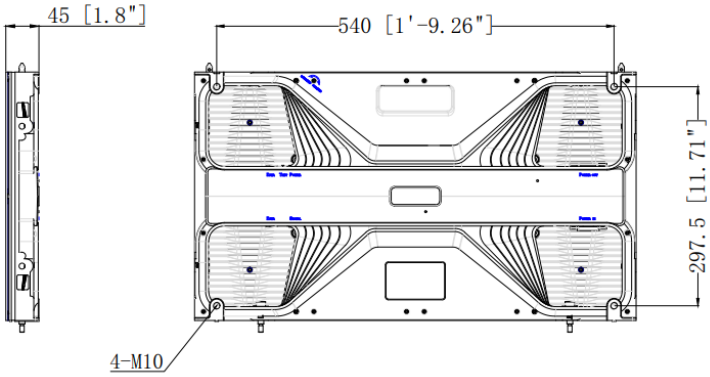

SPECIFICATION PARAMETERS:

Specification	Uluxe 2.5 Pro
Pixel Pitch	2.5mm
LED Type	3-in-1 SMD
Brightness	800cd/m²
Pixel Density	160,000pixels/m²
Pixels Per Panel	240*135pixels
Pixels Per Module	60*135pixels
Module Size	W150mm[0.492ft]×H337.5mm[1.107ft]
Panel Size	W600mm[1.969ft]×H337.5mm[1.107ft]×D45mm[1.772in]
Weight	5kg[11.023lbs]/panel
Maintenance	Front
Ingress Protection	Rear IP30
Curve	0°~+7°（Concave）
Planeness	≤0.15mm
Recommended Viewing Distance	≥2.5m
Environment	Indoor
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,500K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	6000:1
Input Power <Max>	60W/panel
Input Power <Typical>	30W/panel
Input Voltage	100~240VAC
Grey Scale	18bit

Scan Rate	1/27
Refresh Rate	7680Hz
Video Frame Rate	50&60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10℃~+40℃[+14℉~+104℉]/10~80%RH
Storage Temperature/Humidity	-20℃~+60℃[-4℉~+140℉]/10~85%RH
Certification	ETL/CE/CB/FCC/ICES/ROHS/CCC

Note:

1.Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.

2.The specification parameters are reference values. Part of the data comes from Unilumin’ s internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.

3.Different configurations can achieve different refresh rates.