

XS Series

UpadIV1.9-S

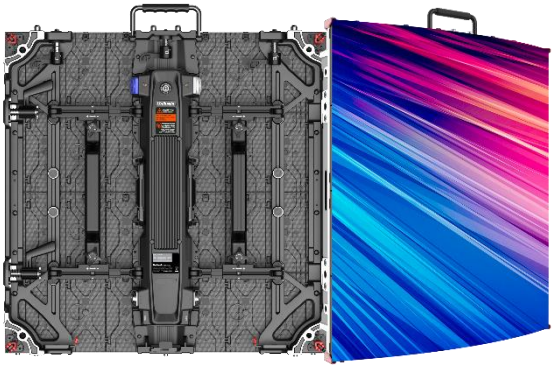

Product features:

- Support ±45°.
- Minimum 1.2m diameter cylinder, only 8 cabinets.
- Perfect 'S' shape.

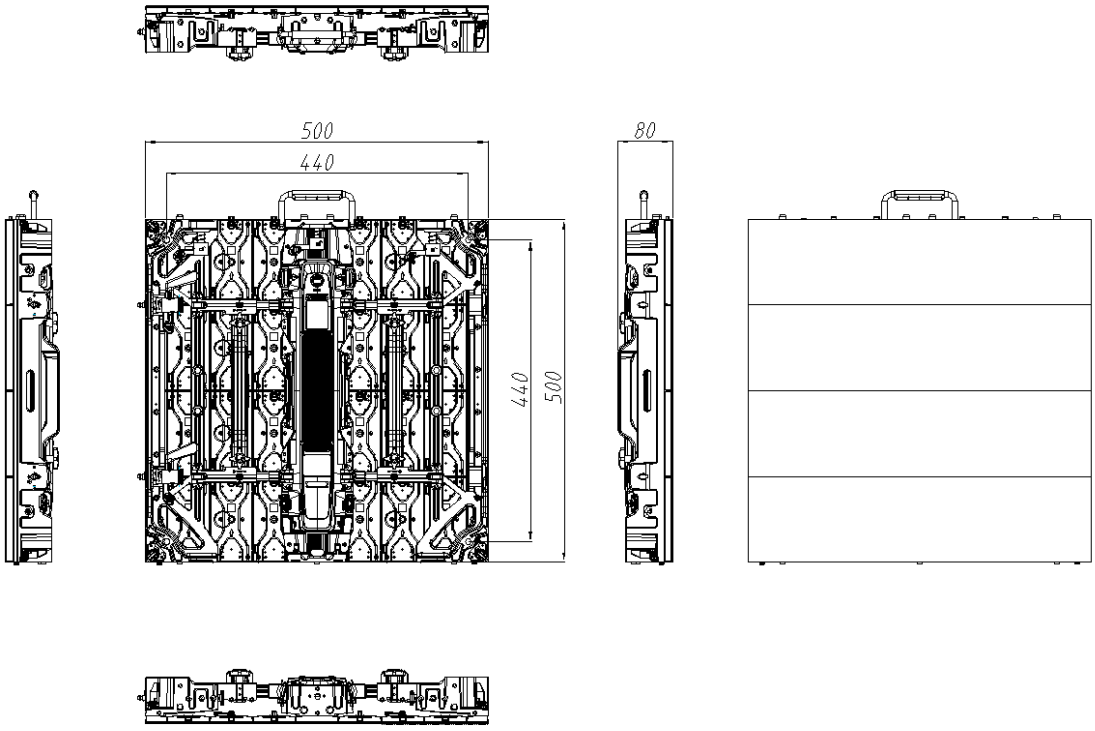

Address: Unilumin, 18 Haoye Road, Fuhai Street, Baoan District, Shenzhen
Contact number: 400-677-3888 postal code: 518103
Website: http://www.unilumin.cn
Update time: 2024/10 V1.4

Main Technical Specifications:

Parameter	UpadIV1.9-S
Pixel Pitch	1.9mm
LED Type	3-in-1 Black SMD
Brightness	800 cd/m²
Pixel Density	262,144 pixels/m²
Pixels Per Panel	256×256 pixels
Module Size	W500mm×H125mm
Panel Size	W500mm×H500mm×D80mm
Weight	7.7 kg/panel
Maintenance	Rear
Ingress Protection	IP30
Curve	(Convex)-45°~+45°(Concave)
Aspect Ratio	1:1
Panel Area	0.25 m²
Recommended Viewing Distance	≥1.9 m
Environment	Indoor
Material	Die-cast Aluminum
Calibration	Support Brightness and Chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,300K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	3,000:1
Input Power <Max>	120 W/panel
Input Power <Typical>	40 W/panel
Input Voltage	100~240 VAC
Processing Depth	14 bit

Scan Method	1/32
Refresh Rate	3,840@60 Hz
Video Frame Rate	50/60 Hz
Input Power Frequency	50~60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10℃~+45℃/10~80%RH
Storage Temperature/Humidity	-20℃~+50℃/10~60%RH
Standard Mounting Configuration	Hanging, Stacking
Certification	FCC/IC/CE/CB/UL/UKCA/EAC

Note:

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment in Unilumin's internal laboratory, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors.