# URMⅢ


## SERIES PRODUCT SPECIFICATION

URMⅢ2.6 Indoor Rental LED Display



## Product Features

- Click-lock — true single-person installation.
- Automatic/Flip shield — comprehensive corner protection.
- Curve range — (Convex) -10°~+10° (Concave).

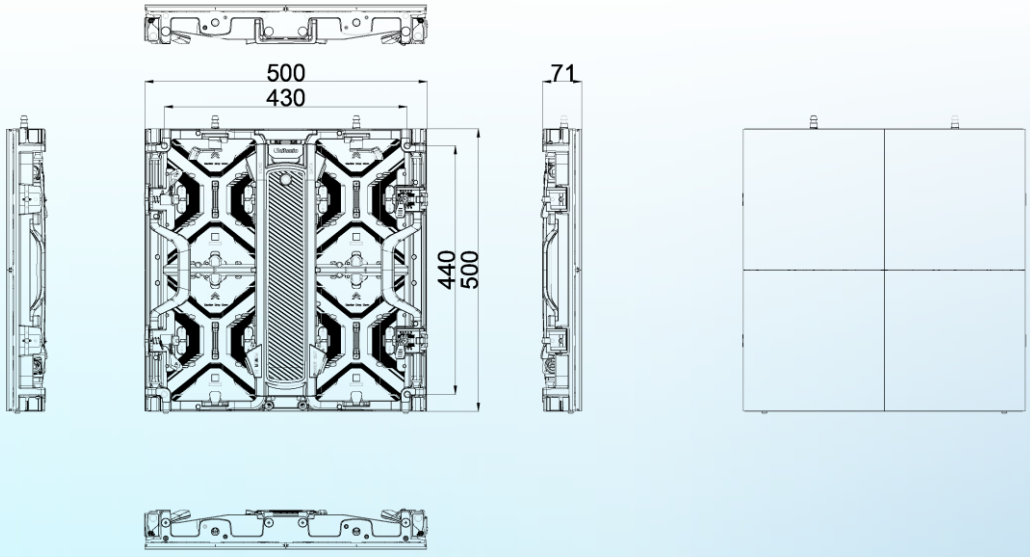

# SPECIFICATION PARAMETERS

| Specification | | URMⅢ2.6 |
|---|---|---|
| Cabinet Parameter | Pixel Pitch | 2.6 mm |
| | LED Type | 3-in-1 Black SMD |
| | Pixel Density | 147,456 pixels/m² |
| | Module Size | 250×250 mm |
| | Pixels Per Panel | 192×192 pixels |
| | Panel Size | 500×500×71 mm |
| | Weight | 7.3 kg/panel |
| | Maintenance | Front & Rear |
| | Ingress Protection | IP30 |
| | Curve | (Convex) -10°~+10°(Concave) |
| | Recommended Viewing Distance | ≥2.6 m |
| | Material | Die-cast Aluminum |
| | Certification | TUV-CE/CB/FCC/IC/UL |
| Optical Parameter | Brightness | 800 nits |
| | Calibration | Support Brightness and Chroma |
| | Color Temperature | 2,000-9,500K Adjustable |
| | Viewing Angle | 160°/160° |
| | Contrast Ratio | 4,000:1 |
| | Gray Scale | 14 bit |
| | LED Life Time | 100,000 Hours |
| Electrical Parameter | Input Power <Max> | 120 W/panel |
| | Input Power <Typical> | 35 W/panel |
| | Input Voltage | 100~240 VAC |
| | Refresh Rate | 7,680@60 Hz |
| | Video Frame Rate | 50/60 Hz |
| | Scan Rate | 1/24 |
| Operation Conditions | Operating Temperature/Humidity | -10~+45℃/10~80%RH |
| | Storage Temperature/Humidity | -20~+50℃/10~60%RH |
| | Standard Mounting Configuration | Hanging, Stacking |

Note:

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment in Unilumin' s internal laboratory, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors.