
URMⅢ


SERIES PRODUCT SPECIFICATION

URMⅢ2.6 Indoor Rental LED Display

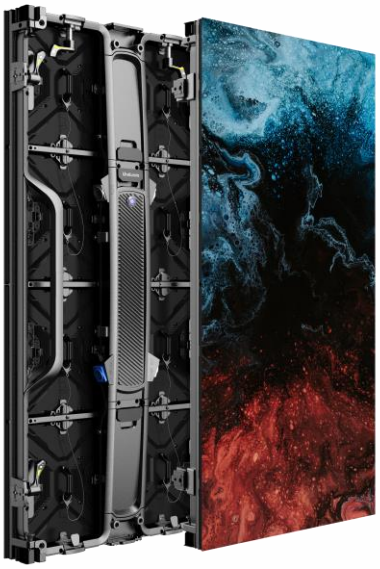

Product Features

- Click-lock — true single-person installation.
- Automatic/Flip shield — comprehensive corner protection.
- Curve range — (Convex) -10°~+10° (Concave).

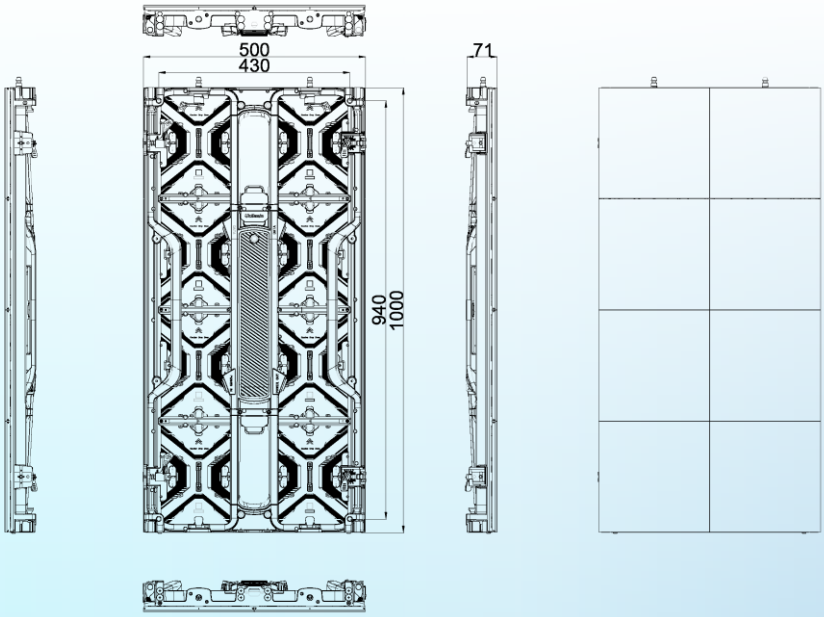

SPECIFICATION PARAMETERS

Specification		URMⅢ2.6
Cabinet Parameter	Pixel Pitch	2.6 mm
	LED Type	U-shield 2424
	Pixel Density	147,456 pixels/m²
	Module Size	250×250 mm
	Pixels Per Panel	192×384 pixels
	Panel Size	500×1,000×71 mm
	Weight	11.6 kg/panel
	Maintenance	Front & Rear
	Ingress Protection	IP30
	Curve	(Convex) -10°~+10°(Concave)
	Recommended Viewing Distance	≥2.6 m
	Material	Die-cast Magnesium
Optical Parameter	Brightness	1,000 nits
	Calibration	Support Brightness and Chroma
	Color Temperature	2,000-9,500K Adjustable
	Viewing Angle	160°/160°
	Contrast Ratio	4,000:1
	Gray Scale	14 bit
	LED Life Time	100,000 Hours
Electrical Parameter	Input Power <Max>	260 W/panel
	Input Power <Typical>	80 W/panel
	Input Voltage	100~240 VAC
	Refresh Rate	7,680@60 Hz
	Video Frame Rate	50/60 Hz
	Scan Rate	1/16
Operation Conditions	Operating Temperature/Humidity	-10~+45℃/10~80%RH
	Storage Temperature/Humidity	-20~+50℃/10~60%RH
	Standard Mounting Configuration	Hanging, Stacking

Note:

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment in Unilumin' s internal laboratory, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors.
3. The power consumption tolerance: ±15%, due to LED batch differences, according to actual situation.