
Upad Series

UpadIV ME07



Product features:

- Foldable and detachable airframe
- Curve range—(Convex) -15°~+15°(Concave)
- High transparency—50%

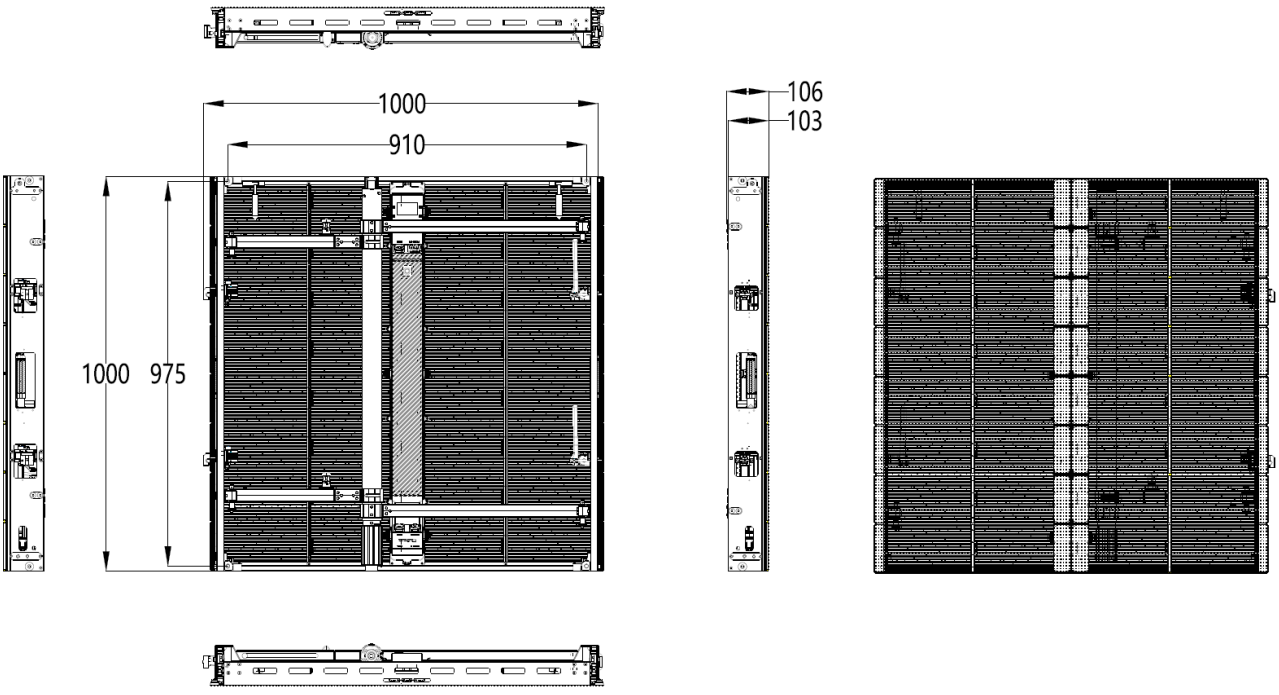

Main Technical Specifications:

Parameter	UpadIV ME07
Pixel Pitch	7.8mm
LED Type	3-in-1 SMD
Brightness	5,000 cd/m²
Pixel Density	16,384 pixels/m²
Pixels Per Panel	128×128 pixels
Module Size	W125mm×H500mm
Panel Size	W1000mm×H1000mm×D103mm
Panel Size with Folded Wind-bracing Frame	W1000mm×H1000mm×D106mm
Panel Weight	18 kg/panel
Weight with Wind-bracing Frame	23 kg/panel
Maintenance	Rear
Ingress Protection	IP65
Curve	(Convex) -15°~+15°(Concave)
Aspect Ratio	1:1
Transparency	50%
Panel Area	1 m²
Recommended Viewing Distance	≥7.8m
Environment	Outdoor
Material	Die-cast Aluminum
Calibration	Support Brightness and Chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,300K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Input Power <Max>	530 W/panel
Input Power <Typical>	175 W/panel

Input Voltage	100~240 VAC
Processing Depth	14 bit
Scan Method	1/4
Refresh Rate	7,680@60 Hz
Video Frame Rate	50/60 Hz
Input Power Frequency	50~60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-20℃~+50℃/10~90%RH
Storage Temperature/Humidity	-20℃~+55℃/10~60%RH
Standard Mounting Configuration	Hanging, Stacking

Note:

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment in Unilumin's internal laboratory, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors