
UpadIV


SERIES PRODUCT SPECIFICATION

UpadIV 1.5 Indoor Rental LED Display

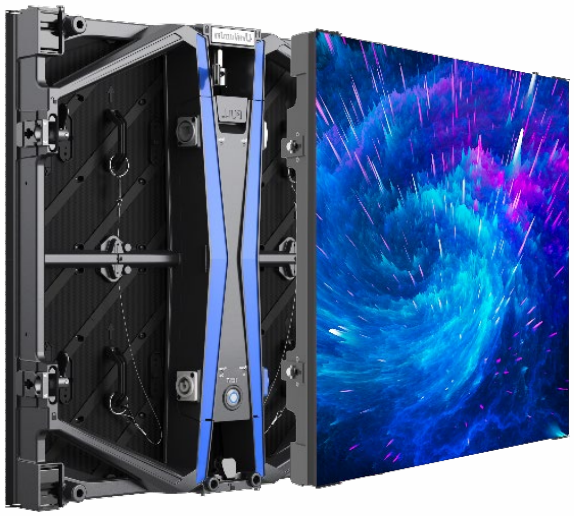

Product Features

- Light weight, easy handling.
- Low loss.
- Brilliant Visual Performance.
- Multiple scenarios, creative display.

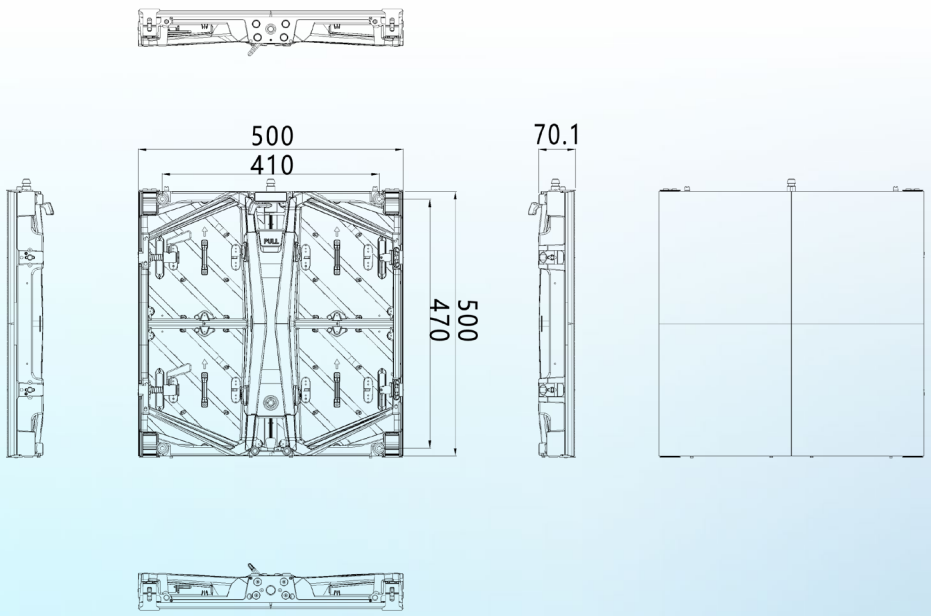

SPECIFICATION PARAMETERS

Specification		UpadIV1.5
Cabinet Parameter	Pixel Pitch	1.5 mm
	LED Type	3-in-1 Black SMD
	Pixel Density	409,600 pixels/m²
	Module Size	250×250 mm
	Pixels Per Panel	320×320 pixels
	Panel Size	500×500×70.1 mm
	Weight	8.3 kg/panel
	Maintenance	Front & Rear
	Ingress Protection	IP30
	Curve	(Convex) -5°~+10°(Concave)(Optional)
	Recommended Viewing Distance	≥1.5 m
	Material	Die-cast Aluminum
	Certification	CE/CB/FCC/IC/UL/RoHS
Optical Parameter	Brightness	1,500 nits
	Calibration	Support Brightness and Chroma
	Color Temperature	2,000-9,300K Adjustable
	Viewing Angle	150°/150°
	Contrast Ratio	6,000:1
	Gray Scale	16 bit
	LED Life Time	100,000 Hours
Electrical Parameter	Input Power <Max>	180 W/panel
	Input Power <Typical>	60 W/panel
	Input Voltage	100~240 VAC
	Refresh Rate	15,360@60 Hz
	Video Frame Rate	23.5-163 Hz
	Scan Rate	1/10
Operation Conditions	Operating Temperature/Humidity	0~+45℃/10~80%RH
	Storage Temperature/Humidity	-20~+50℃/10~60%RH
	Standard Mounting Configuration	Hanging, Stacking

Note:

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment in Unilumin' s internal laboratory, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors.
3. The power consumption tolerance: ±15%, due to LED batch differences, according to actual situation.