# XE


# SERIES PRODUCT SPECIFICATION

XE1.2 Indoor Rental LED Display



## Product Features

- Ultra slim and light weight.
- True-to-life image presentation.
- Specialized for exibitiion.

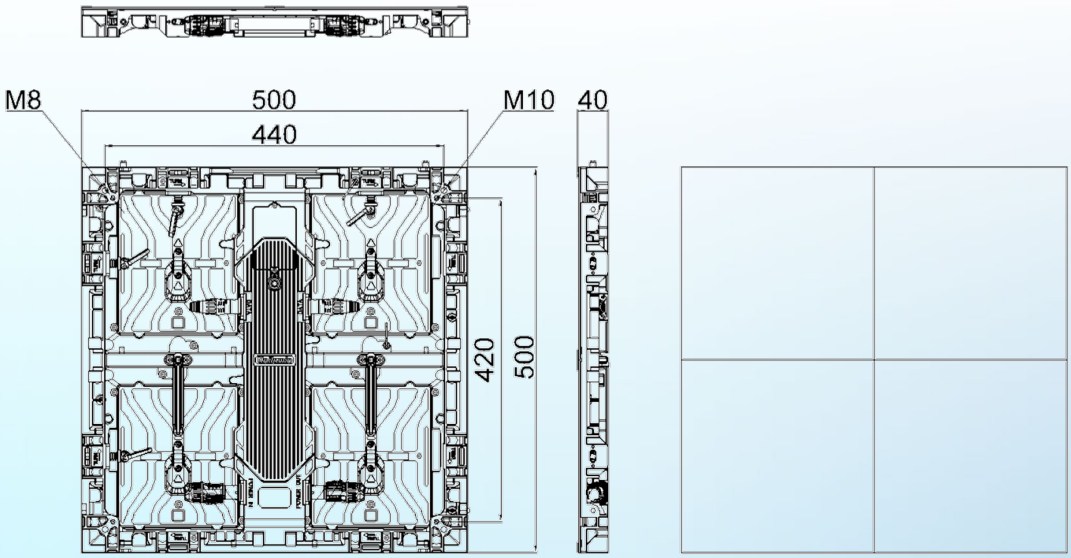

# SPECIFICATION PARAMETERS

| Specification | | XE1.2 MIP |
|---|---|---|
| Cabinet Parameter | Pixel Pitch | 1.2 mm |
| | LED Type | MIP |
| | Pixel Density | 640,000 pixels/m² |
| | Module Size | 250×250 mm |
| | Pixels Per Panel | 400×400 pixels |
| | Panel Size | 500×500×40 mm |
| | Weight | 5.6 kg/panel |
| | Maintenance | Front & Rear |
| | Ingress Protection | IP30 |
| | Recommended Viewing Distance | ≥1.2 m |
| | Material | Die-cast Aluminum |
| Optical Parameter | Brightness | 1,200 nits |
| | Calibration | Support Brightness and Chroma |
| | Color Temperature | 2,000~9,300K Adjustable |
| | Viewing Angle | 160°/160° |
| | Contrast Ratio | 8,000:1 |
| | Gray Scale | 16bit |
| | LED Life Time | 100,000 Hours |
| Electrical Parameter | Input Power <Max> | 130 W/panel |
| | Input Power <Typical> | 40 W/panel |
| | Input Voltage | 100~240 VAC |
| | Refresh Rate | 7,680@60 Hz |
| | Video Frame Rate | 50/60 Hz |
| | Scan Rate | 1/25 |
| Operation Conditions | Operating Temperature/Humidity | -10~+45℃/10~80%RH |
| | Storage Temperature/Humidity | -15~+50℃/10~60%RH |
| | Standard Mounting Configuration | Hanging, Stacking |

Note:

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment in Unilumin' s internal laboratory, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors.
3. The power consumption tolerance: ±15%, due to LED batch differences, according to actual situation.